


PV and EVDBs / 10 WAY Metal Enclosure with RCBO, Type B RCBO ,
Type II SPD ,MCB , Isolator and Blanking Module

General	
Product Image	
Enclosure Material	Metal-Powder Coated
IP Rating	IP66
RCBO	2PCS
RCBO (Type:B)	1PCS
Surge Protection	1PC
MCB	1PC
Isolator	1PC
Blanking Module	3PCS
RCBO	
Rated Voltage	AC230V
Rated Current	B6A-B40A
Pole	1P+N (1 module)
Cable Selection	Flexible 4-10mm ²
Tightening torque for terminals	2.0-3.0Nm
Type B RCBO	
Rated Voltage	AC230V
Rated Current	B6A-B40A
Pole	1P+N (1 module)
Surge Protection	
Test standard	IEC/EN 61643-11
SPD type	T2

PV and EVDBs / 10 WAY Metal Enclosure with RCBO, Type B RCBO ,
Type II SPD ,MCB , Isolator and Blanking Module

Surge Protection	
Max. PV Operating Voltage (Uc)	275V AC
Nominal Discharge Current (8/20 μ s)	20kA
Max. Discharge Current (8/20 μ s)	40kA
Voltage protection level Up	≤ 1.5 kV
Operating temperature	-5°C to +40°C
MCB	
Pole	1P
Rated Voltage	230VAC
Maximum Current Carrying Capacity	B32A
Isolator	
Pole	2P
Rated Voltage	230/240VAC
Maximum Current Carrying Capacity	100A
Outline Dimension Drawing	

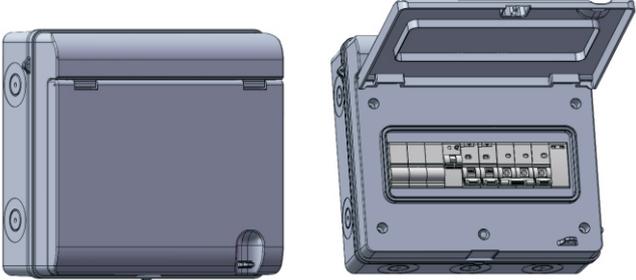